



## Water & Wastewater Single Pump Distribution Systems

### Features:

- Polyethylene tank construction.
- CPVC or polypropylene pump construction.
- TEFC motor comes standard.
- Level control system corrosion resistant.
- Automated features include pump on/off.
- Variety of pump flows and pressures.
- 120 volt single phase electrical operation.




### Additional Custom Options include:

- Custom sized fabricated tanks.
- Alternative pump construction due to liquid and/or flow & pressure requirements.
- Onsite delivery and installation.
- High alarm with auxiliary contacts.

Model	Gallons	Liters	Tank Dimensions (IN.)			Horse Power & Amperage at 120 volts		Tank Inlet	Tank Outlet
			L	W	H	HP	AMP		
LT-1-11	11	41.63	12	12	18	1/5	3	1"	1"
LT-1-18	18	68	18	12	18	1/5	3	1"	1"
LT-1-26	26	98.5	16	16	24	1/3	4.5	2"	1"
LT-1-28	28	106	24	18	15	3/4	8	2"	1"

### PUMP CURVES (GPM/TDH, FT.)

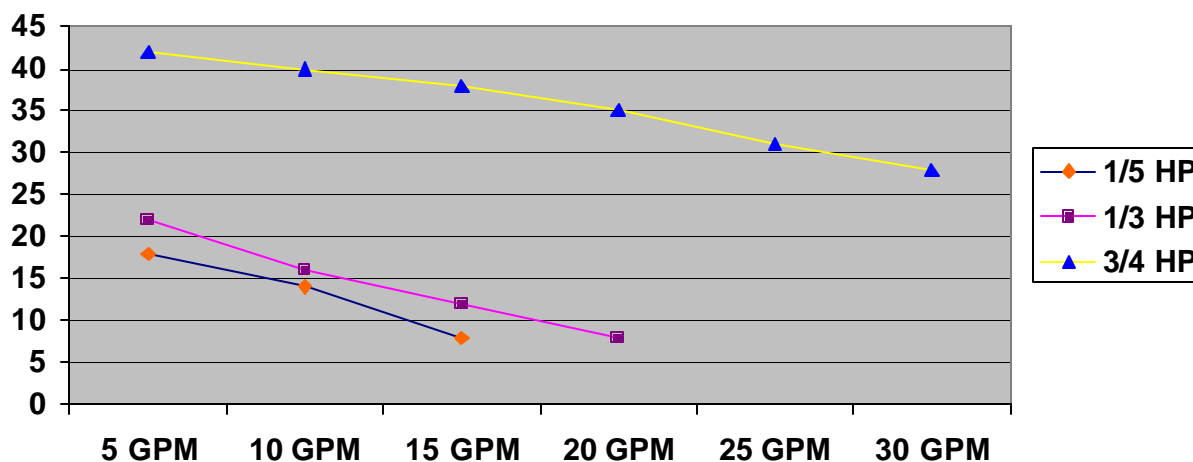

(LT) Liquid Treatment Technologies Standardized Products

Phone: 508-586-9972

[www.lttechnologies.com](http://www.lttechnologies.com)